



MK 4

Quick Guide

Kurzanleitung

Guide rapide

Guida rapida

Guía de inicio rápido

Guia rápido

Beknopte handleiding

Krótká instrukcja obsługi

Snabbguide

Kort vejledning

Πίκαοηje

Γρήγορος οδηγός

Kisa Kilavuz

Краткая инструкция

快速指南

快速使用指南

クイックガイド

퀵 가이드

SENNHEISER



Sennheiser electronic GmbH & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com


Printed in Germany, Publ. 12/20, 587413/A03

In the box




Setup


1

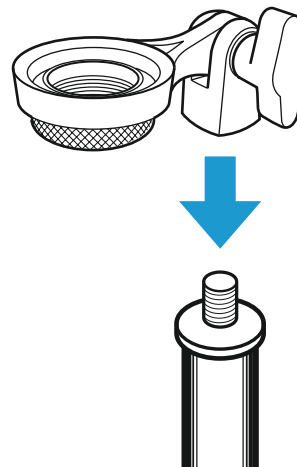



2

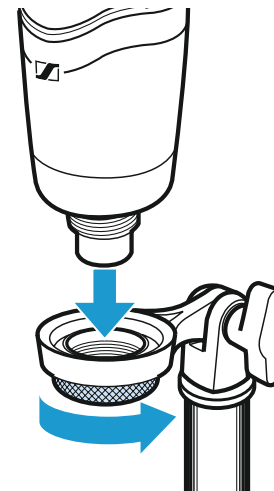



3

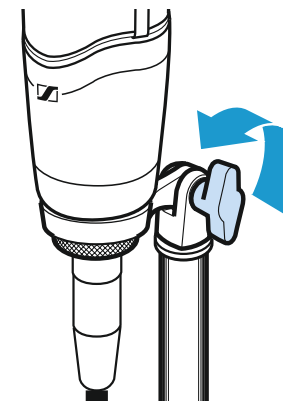


Recording

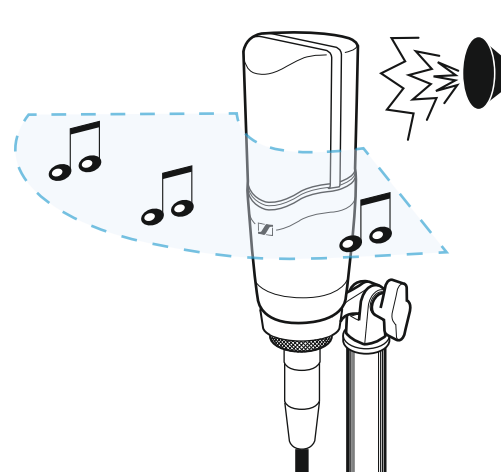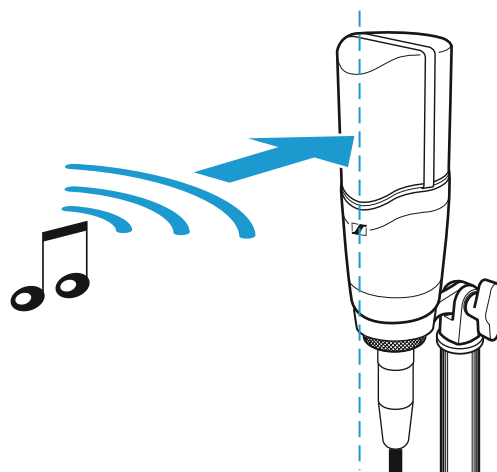


Cleaning

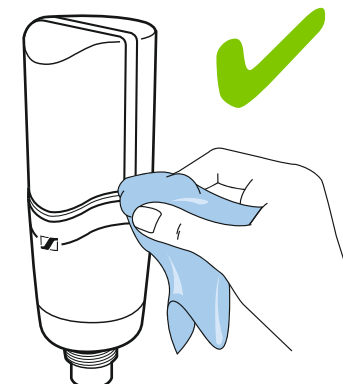


Accessories

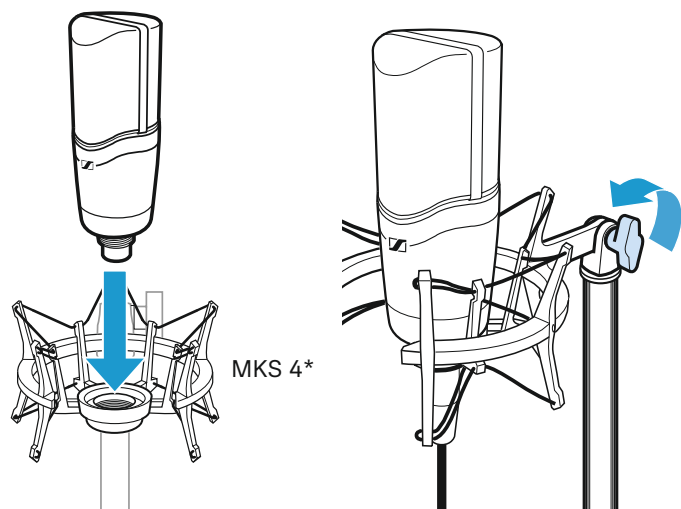

MKS 4*

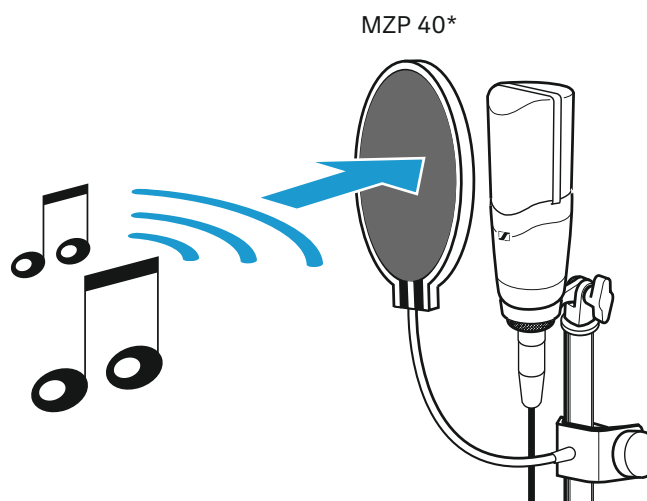



MZP 40*

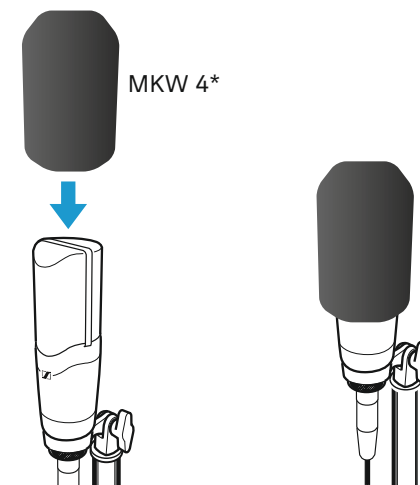


MKW 4*

*optional accessories

Polar pattern and frequency response

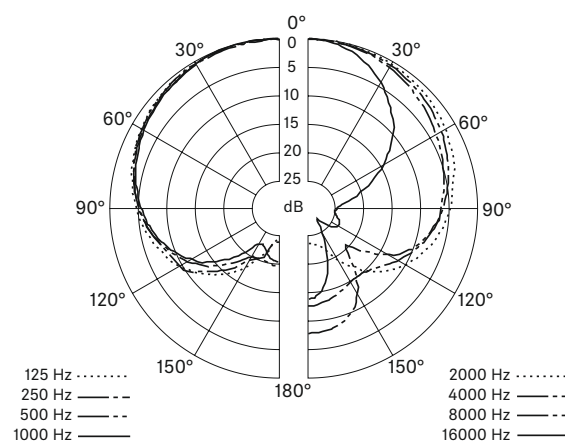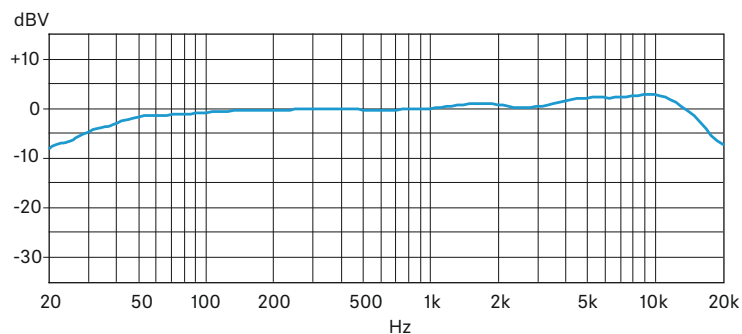

Connector assignment

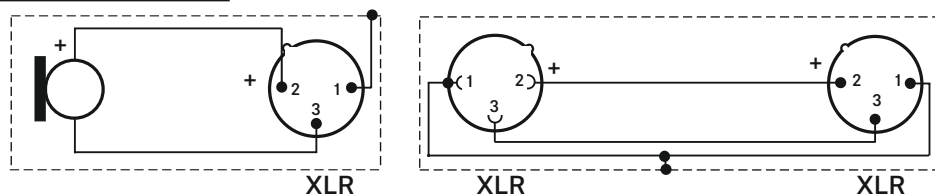

Specifications

Transducer principle	externally polarized condenser microphone
Diameter of diaphragm	25.4 mm / 1"
Acoustic operating principle	pressure gradient transducer
Pick-up pattern	cardioid
Frequency response	20 – 20,000 Hz
Sensitivity	25 mV/Pa
Max. SPL	140 dB
Equivalent noise level	10 dB(A) (DIN IEC 651) 20 dB (CCIR 468-3)
Dynamic range	130 dB
Nominal impedance	approx. 50 Ω
Min. terminating impedance	1 kΩ
Power supply	phantom powering 48 V (P48)
Current consumption	3.1 mA
Diameter	approx. 57 mm
Length	approx. 160 mm
Weight	approx. 485 g
Operating temperature	0 °C to +40 °C
Storage temperature	-20 °C to +70 °C