
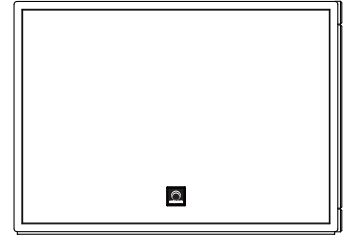


FLEXY^X

F-218s

SPECIFICATIONS



MODEL	F-218s	F-218sa	
Frequency Response ($\pm 3\text{dB}$)	30 Hz~100 Hz	30 Hz~100 Hz	
Frequency Range ($\sim 10\text{dB}$)	25 Hz~120 Hz	25 Hz~120 Hz	
Horizontal Coverage	-	-	
Vertical Coverage	-	-	
LF Power Rating (AES)	1600W @4 Ω	1600W	
HF Power Rating (AES)	-	-	
Sensitivity (@1W/1m) LF/HF	101 dB	101 dB	
Maximum SPL LF/HF	133 dB	133 dB	
Peak SPL LF/HF	139 dB	139 dB	
Driver LF	Two 18" (100mm Voice Coil.) Ferrite	Two 18" (100mm Voice Coil.) Ferrite	
Driver HF	-	-	
Connectors	2 Neutrik NL4	Neutrik XLR + POWERCON + SPEAKON	
Connection Method	LF : 1+1-	-	
Enclosure	15mm, 18mm, 24mm Multilayer Birch Plywood	15mm, 18mm, 24mm Multilayer Birch Plywood	
Grille	Black Steel Mesh + Acoustic Transparent Cloth	Black Steel Mesh + Acoustic Transparent Cloth	
Finish	Black Polyurethane Paint	Black Polyurethane Paint	
Riggings	-	-	
2 Channels Class-D Amp Module@4 Ω	-	SUB Channel 1	SUB Channel 2
	-	2500W	2500W
THD (1Khz, Full Power 4 Ω)	-	1%	
Signal to noise ratio	-	103 dB	103 dB
Active Gain (1KHz, 8 Ω)	-	32 dB	32 dB
Input	-	Neutrik & Male XLR & Female XLR	
Input Impedance	-	20K Ω Balanced / 10K Ω Unbalanced	
Input Connection (Full-Range)	-	-	
Input Connection (Sub)	-	Neutrik NL4MP (SUB: 1+1-)	
Cooling System	-	The airflow direction from back to front	
Voltage Requirements	-	200-240V ~ 50-60Hz	
Dimensions (H x W x D)	750 x 535 x 1158 mm	750 x 535 x 1158 mm	
Net Weight	83 kg	90 kg	