




ACS-1000 SERIES

PROFESSIONAL ACTIVE COLUMN SPEAKER SYSTEM

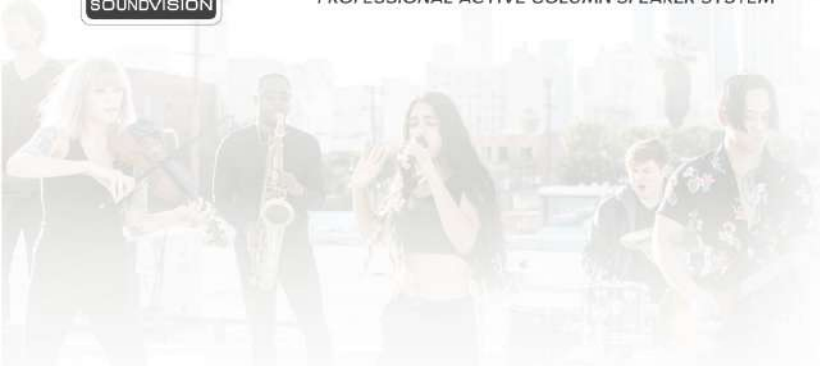

ACS-1000 SERIES Professional Active Column Speaker System which can cover the usage area from small to large Designed for hi-end professional sound performance especially for frequency response up to 42Hz ~ 20KHz -10dB, Power maximum 800Watts Amplifier Class D Bi-amp with DSP processor 5 Preset for optimum performance. High-quality audio streaming with Bluetooth TWS (True Wireless Stereo)

Ideal for livesound concert, event, shopping mall, meeting room-training, fitness, restaurant, hotel banquet room.

This series includes ACS-1000S (subwoofer), ACS-1000C (column speaker)

FEATURE

- Subwoofer Component: 10", 2" voice coil
- Satellite Components: 4 x 3" Full Range Speaker
- Frequency response: 42Hz~20KHz -10dB
- Max. SPL / (Peak): 118dB/125dB
- Power maximum 800Watts
- Built-in Amplifier Class D Bi-amp
- Built-in DSP Processor Mode: 5 modes (Live, Music, Dance, Pop, Speech)
- Built-in Media player:TWS Bluetooth 5.3 (True Wireless Stereo)
- Dispersion Angle (H x V): 80° x 20°
- Operating voltage AC 100 – 240V, 50/60Hz

Certifications : CE and RoHS

SOUND VISION CO., LTD.

99/189 Soi Kamnan Tinnakorn, Sala Klang, Bang Kruai, Nonthaburi 11130 Thailand



Email : info@soundvision.co.th Support : 02-433-9988 LINE Official : @soundvision www.soundvisionpro.com



SPECIFICATIONS

Model	ACS-1000S (Subwoofer)	ACS-1000C (Column)
Transducer	Subwoofer Components: 10", 2" voice coil	4 x 3" Neodymium Full Range Speaker
Frequency Response	42Hz~150Hz (-10dB)	150Hz~20KHz (-10dB)
Rated Power	200W / 400W (MAX)	200W / 400W (MAX)
Amplifier	Class D Bi-amp	
Sensitivity	90dB 1m/1W	92dB 1m/1W
Maximum SPL	118dB / 125dB(Peak)	118dB / 125dB(Peak)
Nominal Impedance	4 Ω	4 Ω
Dispersion Angle (H x V)		80°X 20°
Built-in DSP Processor	5 modes (Live, Music, Dance, Pop, Speech)	
Audio Streaming Wireless	TWS Bluetooth 5.3 (True Wireless Stereo)	
Connection		
Line Input	1 x Combo XLR or 1/4" Jack (Female) 1 x RCA (L/R)	
Line Output	1 x XLR (Male)	
Speaker Port	1 x Speakon (Output)	1 x Speakon (Input)
General		
Operating voltage	AC 100 – 240V 50Hz/60Hz	
Power consumption (IEC)	100W	
Dimensions (H x W x D)	445 x 320 x 465mm	450 x 85 x 105 mm
Net Weight	14.5kgs.	1.4 kgs.

EXAMPLE CONNECTION DIAGRAM

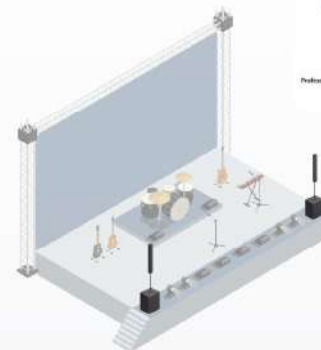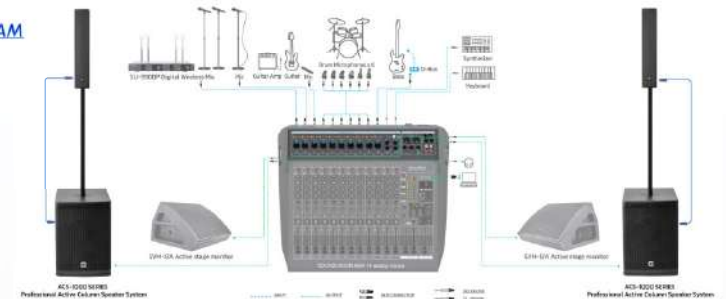

ACS-1000 Series Ideal for live sound concert, event, shopping mall, meeting room – training, fitness, restaurant, hotel banquet room.